



CTA 1809/0/PB/SM/S1

Technical Data

Unique Features


Flexible element, clutch allows 360° rotation, right angle knuckle adjustable 0 – 90°

Electrical Properties


Frequency Range	:	890~960 & 1710~2170MHz
Impedance	:	50 Ohms
VSWR	:	2.0 max at resonance
Gain	:	0 dBi
Polarization	:	vertical
RF Power Handling	:	10 W

Mechanical Properties


Standard Connector	:	SMA, male
Dimensions	:	(191 × 18 × 15) mm
Color	:	black
Case	:	Nylon
Temperature Range	:	-40 °C~+80 °C

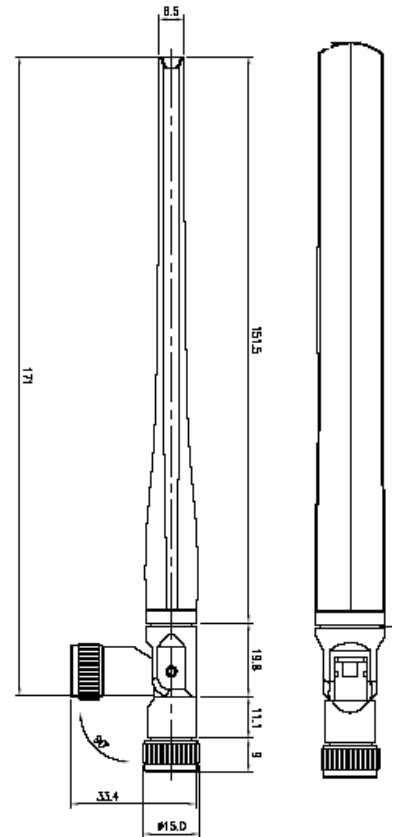

RF Parameters

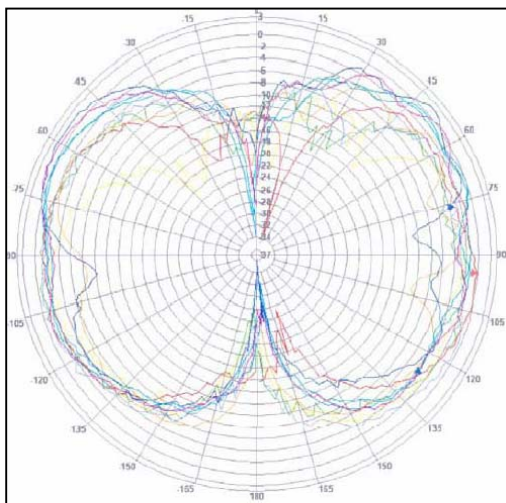

Rad. Pattern

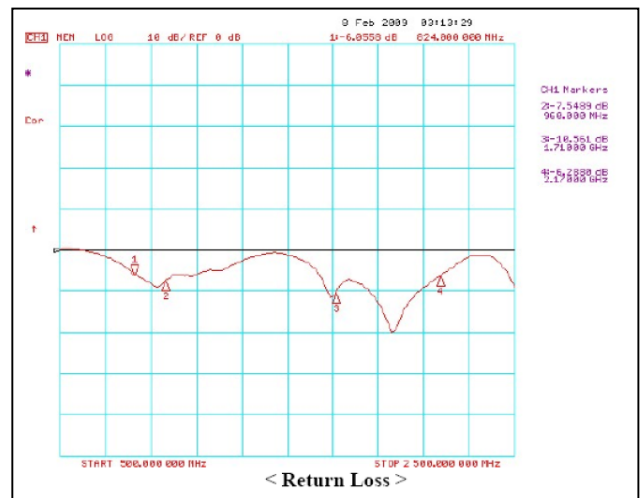

VSWR

Specifications subject to change without any notice !

CompoTEK GmbH, Lindwurmstrasse 97A, 80337 München, Germany

Fon:+49 (0)89/5443230, Fax:+49 (0)89/535623

info@compotek.de, www.compotek.de