



CTA 2450/2/DR/SM/H1

Technical Data

Unique Features

Flexible element, clutch allows 360° rotation, right angle knuckle adjustable 0 – 90°

Electrical Properties


Frequency Range	:	2.4~2.5 GHz
Impedance	:	50 Ohms
VSWR	:	1.5 max at resonance
Gain	:	2 dBi
Radiation	:	omni, ½ wave coaxial dipol
Polarization	:	linear, vertikal
RF Power Handling	:	50 W

Mechanical Properties

Standard Connector	:	SMA male
Total Length	:	107.5 mm
Antenna Cover	:	polyurethane
Color	:	black
Temperature Range	:	-40 °C~+80 °C



Radiation Pattern

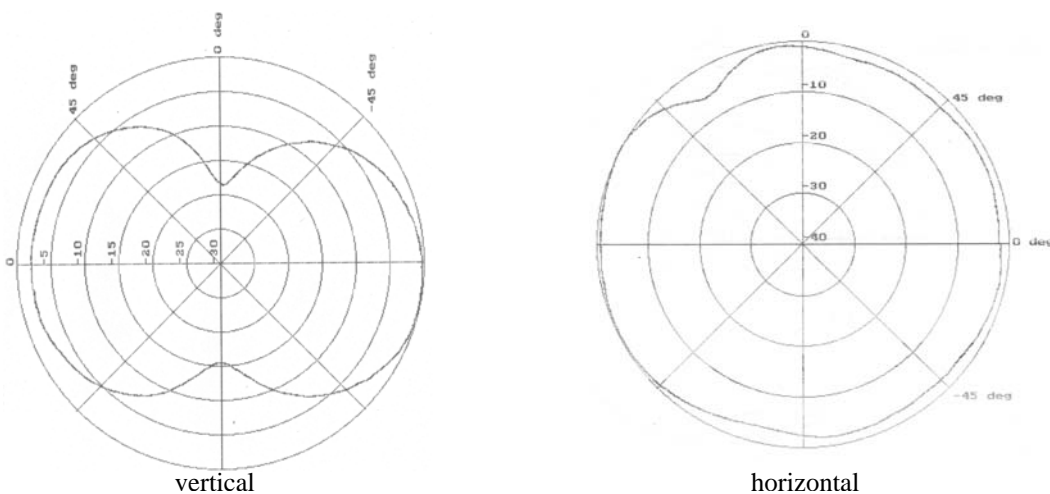

Specifications subject to change without any notice !

CompoTEK GmbH, Lindwurmstrasse 97A, 80337 München, Germany
Fon:+49 (0)89/5443230, Fax:+49 (0)89/535623
info@compotek.de, www.compotek.de