



CTA 2450/5/DS/NM/S2

Technical Data

Unique Features

Compact size, high performance, easy installation



Electrical Properties

Frequency Range	:	2.4~2.5 GHz
Impedance	:	50 Ohms
VSWR	:	1.5 max at resonance
Gain	:	5 dBi
3 dB Beamwidth	:	E-Plane 38°
Radiation	:	omni, dipol array
Polarization	:	linear, vertical
RF Power Handling	:	50 W

Mechanical Properties

Standard Connector	:	N male
Total Length	:	255 mm
Color	:	black
Temperature Range	:	-30 °C~+60 °C

Radiation Pattern

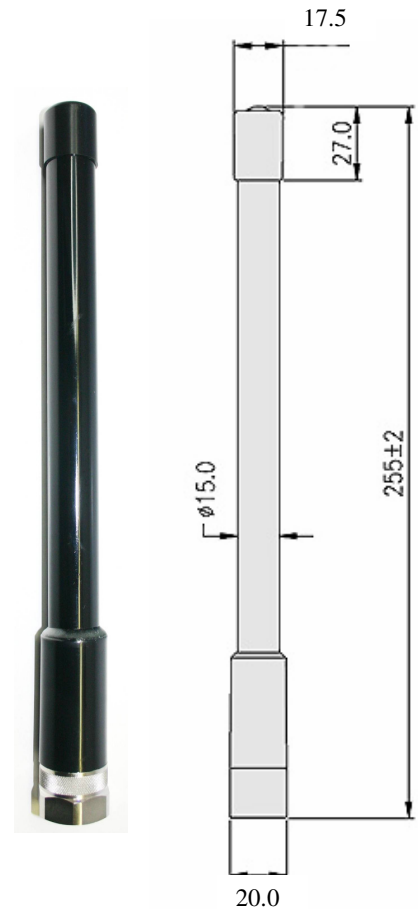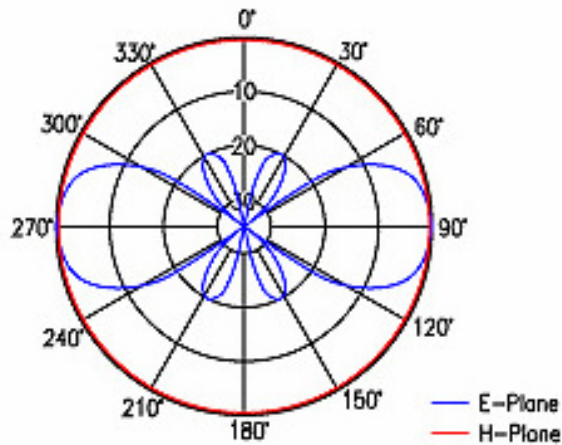

Specifications subject to change without any notice !

CompoTEK GmbH, Lindwurmstrasse 97A, 80337 München, Germany
Fon:+49 (0)89/5443230, Fax:+49 (0)89/535623
info@compotek.de, www.compotek.de