



## CTA 2458/2/DB/SM/S1

### Technical Data

#### Unique Features

Dual-band, flexible element, clutch allows 360° rotation, right angle knuckle adjustable 0–90°

#### Electrical Properties


Frequency Range	:	2.4~2.5 GHz & 5.15~5.85 GHz
Impedance	:	50 Ohms
VSWR	:	2 max
Gain	:	2 dBi
Radiation	:	omnidirectional
Polarization	:	vertical
RF Power Handling	:	10 W

#### Mechanical Properties


Standard Connector	:	SMA male
Length (bent, 90°)	:	80 mm
Length (straight, 180°)	:	100 mm
Antenna Cover	:	nylon
Color	:	black
Temperature Range	:	-40 °C~+80 °C



#### Radiation Pattern

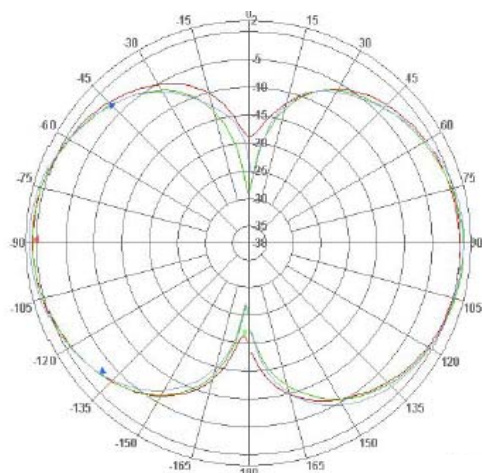

Vertical 2.4 GHz

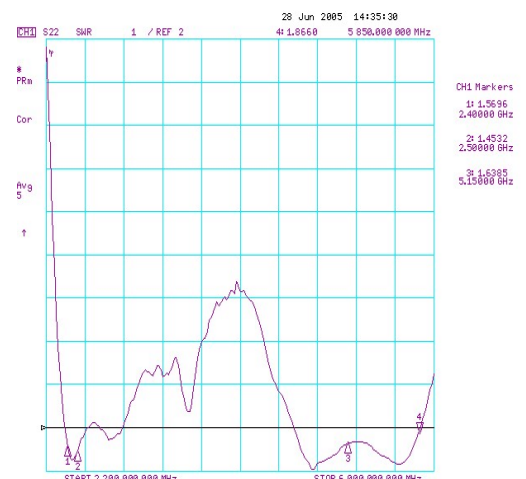

VSWR 2 ~ 6 GHz

Specifications subject to change without any notice !

CompoTEK GmbH, Lindwurmstrasse 97A, 80337 München, Germany

Fon:+49 (0)89/5443230, Fax:+49 (0)89/535623

[info@compotek.de](mailto:info@compotek.de), [www.compotek.de](http://www.compotek.de)