


AKER ELECTRONIC CO., LTD

CompoTEK GmbH CTA321-26.000-16-10/10/A

Specifications

1. FREQUENCY : 1-1. NOMINAL FREQUENCY 1-2. MODE 1-3. FREQUENCY TOLERANCE (at $25 \pm 3^{\circ}\text{C}$) 1-4. FREQUENCY STABILITY (VS. 25°C)	26.000000 MHZ Fundamental ± 10 PPM ± 10 PPM
2. ENVIRONMENTAL CONDITIONS : 2-1. OPERATING TEMPERATURE RANGE 2-2. STORAGE TEMPERATURE RANGE 2-3. AGING RATE	$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$ ± 3 PPM / Year
3. ELECTRICAL SPECIFICATIONS : 3-1. TEST CIRCUIT 3-2. LOAD CAPACITANCE 3-3. DRIVE LEVEL 3-4. EQUIVALENT SERIES RESISTANCE 3-5. SHUNT CAPACITANCE (C_0)	S & A 350A with π fixture 16 PF 10 μW 100 Ω (MAX) 5.0 PF (MAX)

MARKING

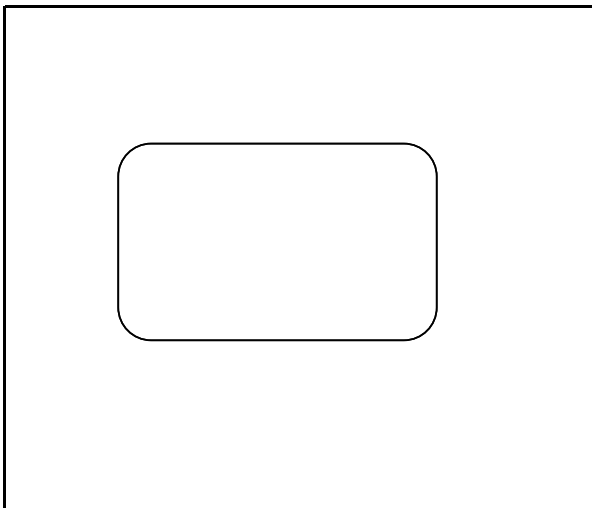

OUTLINE DIMENSION (Unit : mm)

