



## CTA 169/0/WS/SM/T2

### Technical Data

#### Unique Features

External High-Flex Rubber Antennas for 169MHz


#### Electrical Properties

Frequency : 169 MHz  
Impedance : 50 Ohms  
VSWR : 2.0  
Gain : 0 dBi

#### Mechanical Properties

Standard Connector : SMA-Male  
Size : 293 mm  
Color : black  
Operation Temperature range: -30°C to +85°C

#### RF - Parameters

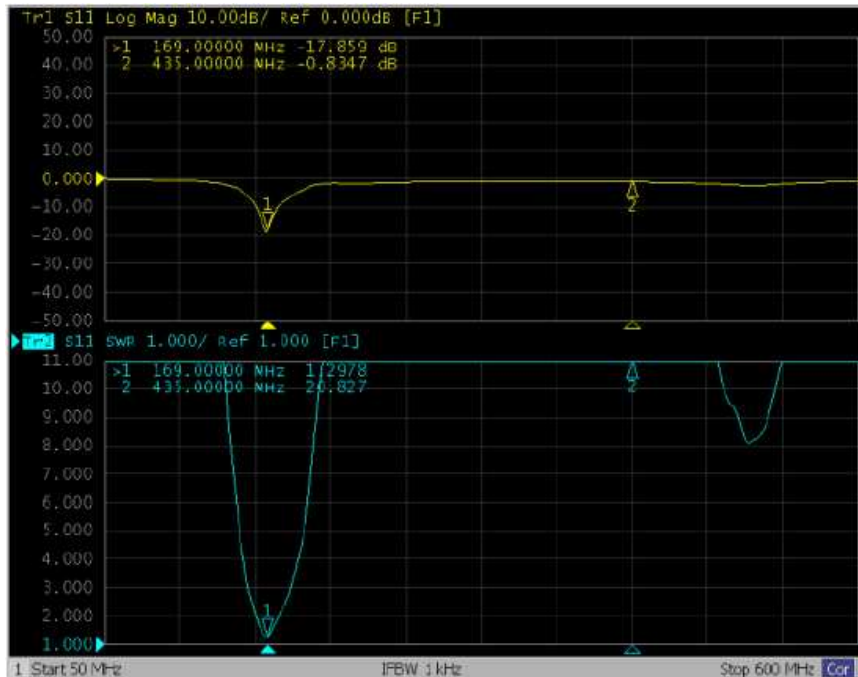

Specifications subject to change without any notice !

CompoTEK GmbH, Lindwurmstrasse 97A, 80337 München, Germany  
Fon:+49 (0)89/5443230, Fax:+49 (0)89/535623  
[info@compotek.de](mailto:info@compotek.de), [www.compotek.de](http://www.compotek.de)

