

AllDisc Combi GNSS

Combination Antenna

AllDisc Combi GNSS is a low profile, 5G ready antenna with durable design. The antenna is ground plane independent and enables flexible and easy installation. Perfect for M2M applications such as fleet management, track and trace and smart metering.



- Cellular: 698-960MHz, 1710-2690MHz and 3400-3800MHz
GNSS: 1575-1610MHz (GPS: L1, Galileo: E1, Glonass: L1)
- Discreet design with center screw installation
- IP6K9K class
- DC short
- Cable approved acc ECE-R118
- Verified according to VW test requirements
- Designed in Sweden with Design registration

Specifications

Electrical

Cellular (2G/3G/4G/5G)

Frequencies	698-960MHz, 1710-2690MHz, 3400-3800MHz	
Impedance	50Ω	
Polarization	Vertical	
VSWR	698-790MHz	≤ 2:1
	790-880MHz	≤ 2.0:1
	880-960MHz	≤ 2.7:1
	1710-1880MHz	≤ 2.5:1
	1880-2170MHz	≤ 2:1
	2500-2690MHz	≤ 3.0:1
	3400-3800MHz	≤ 3.0:1
Gain, on ground plane (peak gain, excluding cable)	698-960MHz	4.5dBi
	1710-1880MHz	5dBi
	1920-2170MHz	4.5dBi
	2500-2690MHz	3.5dBi
	3400-3800MHz	7dBi
Gain, on non-conducting material (peak gain, excluding cable)	698-880MHz	1dBi
	880-960MHz	1.5dBi
	1710-1880MHz	4dBi
	1920-2170MHz	3dBi
	2500-2690MHz	3dBi
	3400-3800MHz	6.5dBi
Max power	10W	

SMARTEQ[™]
WIRELESS

Smarteq, based in Stockholm, Sweden, is a leading developer of antennas and antenna systems for increased availability. Smarteq aims towards the market segments industry, energy and vehicles.

smarteq.com info@smarteq.com +46 8 792 92 00



GNSS

Frequencies	1575-1610MHz (GPS: L1, Galileo: E1, Glonass: L1)
Impedance	50Ω
Polarization	RHCP
VSWR	≤ 2.0:1
Gain Passive (peak gain)	-3.5dBic @ fc
Gain Active	27dB
Supply Voltage	2.8-5.5V
Current Consumption	15-25mA

Mechanical

Dimensions (D x H)	138 x 55mm
Installation	Hole mount with center screw Hole dimension Ø19mm Installation thickness ≤ 8.5mm Min. installation radius 2000mm
Cable	RG316, brown Cable length upon request
Connector	Connector type upon request
Weight	~200g
Material	PC/PBT/Aluminum alloy
Color	Black, White, Grey (RAL7035)
IP class	IP6K9K
Temperature	Storage -40°C to +85°C Operating -40°C to +85°C

Other

This part is RoHS compliant.


Certified according to 2014/53/EU Radio Equipment Directive (RED)

Type approval: E5 (ECE R10.5)

Accessories

710452 AllDisc Bracket White

Smarteq reserves the right to change specifications without prior notice.

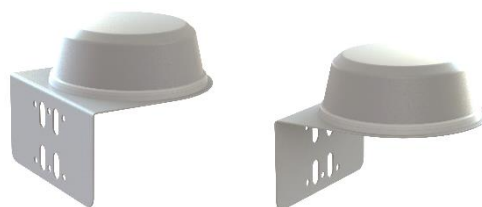

AllDisc Bracket